



SUPPLY

Workwear & Profile



FALL LIMIT

FALL ARREST WORKSAFE LANYARD 2M BLACK ONE SIZE

Durable, flexible fall arrester line with a large hook.

[Read More](#)

SKU: 2117231

Price:

Kategori: [Fall Limit](#)





MILLER MANYARD TWIN EDGE FLEXIBEL 2X1,5M LARGE HOOK ALU 63MM

Double flexible fall arrester line 2x1.5m with large aluminum hooks. Durable housing and tested and approved for falling over edge ($r \geq 0.5\text{mm}$).

[Read More](#)

SKU: 2117643

Price:

Kategori: [Fall Limit](#)

HARNESS H500 IC7 SIZE 2

Lightweight fall protection harness with comfortable and ventilated back plate, flexible straps and quick release buckles.

[Read More](#)

SKU: 2120215

Price:

Kategori: [Fall Limit](#)



HEIGHT/STATURE (EN CM)	
	150 155 160 165 170 175 180 185 190 195 200
WEIGHT/PROBLEM (EN KG)	S1
	S2
S0	



HARNESS VOLT PETZL

**FALLSKYDDS- OCH
ARBETSPOSITIONERINGSSELE MED
KOPPLINGSPUNKT FÖR GLIDLÅS PÅ
VERTIKAL VAJER ELLER SKENA. GLIDSKYDD
PÅ BALTE OCH RYGGPLATTA FÖR ATT
FÖRHINDRA SLITAGE VID ARBETE I
VINDKRAFTVERK ELLER TRÅNGA
UTRYMMEN.**

Colour

Black/Yellow

[Read More](#)

SKU: 211824

Price:

Kategori: [Fall Limit](#)



DOUBLE ELASTIC FALL ARREST WORKSAFE TWIN LANYARD 2X2M

Durable, flexible double fall arrester line with large hook.

[Read More](#)

SKU: 2117229

Price:

Kategori: [Fall Limit](#)



HARNESS WORKSAFE W COMFORT CLICK UNISIZE

BEKVÄM SELE MED VADDERING PÅ RYGG/AXLAR OCH PÅ BENBANDEN. W-DESIGNEN SER TILL ATT BROSTFORANKRINGEN HAMNAR PÅ EN BRA HOJD. 2ST D-RINGAR I ALUMINIUM FÖR INKOPPLING I BROST ELLER RYGG SAMT STORLEKSJUSTERING OCH SNABBSPANNEN I ALUMINIUM PÅ BEN- OCH BROSTBAND. WORKSAFE W COMFORT CLICK ÄR GODKÄND FÖR TYNGRE ANVÄNDARE OCH HAR EN FALLINDIKATOR SOM UNDERLÄTTAR ÄRLIG KONTROLL.

[Read More](#)

SKU: 2117228

Price:

Kategori: [Fall Limit](#)



HARNESS DELTA COMFORT W BELT XL

3M DELTA COMFORT HELSELE MED BÄLTE

DELTA COMFORT SELE MED SNABBKOPPLING OCH BALTE. EN HÅLLBAR, ENKEL OCH BEKVÄM SELE. BELAGDA OCH ROSTSKYDDADE METALLDELAR OCH. VÄVBAND MED REPEL-TEKNIK SOM ÄR VATTENAVSTOTANDE OCH NOTNINGSBESTÄNDIGT. PATENTERAD TRIANGULAR DESIGN SOM GER DEN EN EGEN FORM SÅ ATT DU TAR PÅ DIG DEN SNABBT OCH ENKELT. TECH-LITE SNABBSPANNEN I ALUMINIUMLEGERING MINSKAR VIKTEN OCH MÅNGDEN ENERGI SOM KRAVS FÖR ATT UTFÖRA ARBETET.



[Read More](#)

SKU: 2107185

Price:

Kategori: [Fall Limit](#)





MILLER TURBOLITE EDGE FALL PROTECTION BLOCK

MILLER TURBOLITE EDGE ÄR KOMPLETT KANTTESTAT OCH CERTIFIERAT FÖR ARBETARE SOM VÄGER UPP TILL 140 KG TACK VARE ETT MYCKET SLITSTARKT FÖRSTARKT VÄVBAND. LIVLINAN ÄR ÄVEN GODKÄND FÖR ATT FASTAS VID FOTNIVA (FF2) FÖR ATT SKYDDA ARBETARE SOM RISKERAR ATT FALLA ÖVER EN KANT MEN INTE KAN VALJA NÅGON HÖGRE FÖRANKRINGSPUNKT (FF1 ELLER FF0). DEN HAR EN SNABB LÅSMEKANISM SOM MINSKAR AVSTÅNDET FÖR FALLSTOPP, NÅGOT SOM ÄR SÄRSKILT VIKTIGT NÄR DEN FRIA FALLHÖJDEN ÄR KORT.

[Read More](#)

SKU: 2105452

Price:

Kategori: [Fall Limit](#)



MILLER FALCON EDGE FALL PROTECTION BLOCK

FALCON EDGE GER SKYDD FÖR ALLA ARBETEN PÅ HOJD. FALCON EDGE AR KONSTRUERAT FÖR ARBETE DAR DET FINNS RISK FÖR FALL ÖVER EN KANT (KANTRADIE $\geq 0,5$ MM). FALLSKYDDSBLOCKET KAN ANVANDAS HORISONTellt, VERTIKALT, MONTERAT OVERHEAD OCH FORANKRAS I FOTNIVA. FALCON EDGE UPPFYLLER DE STRANGASTE SAKERHETSSTANDARDERNA, INKLUSIVE EN360 TYP B, VG11 (REV 08). BLOCKET HAR EN ROBUST DESIGN MED KORROSIONSBESTANDIGA INTERNA KOMPONENTER.

[Read More](#)

SKU: 2103596

Price:

Kategori: [Fall Limit](#)



FALL ARRESTER FALCON EDGE 9M GALV WIRE

Falcon Edge provides protection for all work at height. Falcon Edge is designed for work where there is a risk of falling over an edge (edge radius ≥ 0.5 mm). The fall protection block can be used horizontally, vertically, mounted overhead and anchored at foot level. Falcon Edge meets the strictest safety standards, including EN360 Type B, VG11 (Rev 08). The block has a robust design with corrosion-resistant internal components.

[Read More](#)

SKU: 2103540

Price:

Kategori: [Fall Limit](#)



TURBOLITE FALL LIMITER

MILLER TURBOLITE EDGE ÄR KOMPLETT KANTTESTAT OCH CERTIFIERAT FÖR ARBETARE SOM VÄGER UPP TILL 140 KG TACK VARE ETT MYCKET SLITSTARKT FÖRSTARKT VÄVBAND. LIVLINAN ÄR ÄVEN GODKÄND FÖR ATT FÄSTAS VID FOTNIVA (FF2) FÖR ATT SKYDDA ARBETARE SOM RISKERAR ATT FALLA ÖVER EN KANT MEN INTE KAN VALJA NÅGON HÖGRE FÖRANKRINGSPUNKT (FF1 ELLER FF0). DEN HAR EN SNABB LÅSMEKANISM SOM MINSKAR AVSTÅNDET FÖR FALLSTOPP, NÅGOT SOM ÄR SÄRSKILT VIKTIGT NÄR DEN FRIA FALLHÖJDEN ÄR KORT.

[Read More](#)

SKU: 2060966

Price:

Kategori: [Fall Limit](#)



PORTWEST ULTRA 2 POINT HARNESS

This full body harness features a rear dorsal D-Ring and front D-Rings with 3 adjustment points. Quick release buckles for easy fitting. Rip indicators are installed to aid with inspections.

Features

- Leg adjustment points
- Chest adjustment point
- Shoulder adjustment points
- Ergonomic quick release buckle
- Dorsal D-ring
- Fall indicators
- Max rated load 140kg

Size
Colour

s-m-l, xl-2xl
Black/Orange

[Read More](#)

SKU: FP72

Price:

Kategori: [Fall Limit](#)



CMBV TRAVELLING CARRIAGE WITH KARABINER

DESCRIPTION

With the carriage CMBV from Vertic you can connect and disconnect everywhere on the wire and move freely along it. The carriage fits the wire systems Vertiligne, Combiligne and Altiligne from Vertic.

SEGMENTS

- General industry
- Tower climber
- Telecom
- Wind energy

PRODUCT PROPERTIES

Energy absorber	No
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	100.0
Material	Stainless steel

CLASSIFICATION

EN-standard EN 353-2 : 2002, EN 795 : 2012

Notified body 0158, DEKRA Testing and Certification,
Dinnendahlstr 9, DE-44809 Bochum, Germany

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span 10 years

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID No

DOCUMENTS

Declaration of Conformity Yes

[Read More](#)

SKU: 012296140

Price:

Kategori: [Fall Limit](#)



ASCENDING/DESCENDING KIT ONE SIZE

- 2 Point Harness
- Carabiner
- 12mm Detachable Rope Grab
- 15 metre Kernmantle Static Rope
- Nylon Drawstring Bag

Features

- CE certified

[Read More](#)

SKU: FP67RER

Price:

Kategori: [Fall Limit](#)



WORKER SINGLE-ROPE H 2M

A fall arrest lanyard with rope that is tested and approved for users up to 100 kg. The 12 mm thick rope makes it enduring. The fall arrester is located in an openable bag to make it easier to carry out an annual inspection in accordance with EN 365. The product is suitable for work where the user does not need to reconnect.

SEGMENTS

- General industry
- Scaffolding

Attaching connector 1	Oval twist lock carabiner in aluminum, mounted with captive pin
Attaching connector 2	Big aluminum hook with 60 mm opening
Adjustable under load	No
Energy absorber	Yes
Fall indicator	Yes
Mechanics	Tear-webbing absorber with rope grab
Maximum number of users	1
Maximum load (kg)	100.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Polyamide
Rope	12 mm kern mantle rope in polyamide by the brand Patron from Teufelberger

CLASSIFICATION

PPE-category Category 3

EN-standard EN 355 : 2002

Notified body 0402, RISE Research Institutes of Sweden,
Box 857, SE-50115 Borås, Sweden

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

DOCUMENTS

Declaration of Conformity	Yes
Manual languages	Danish , English , Finnish, French, German, Greek, Norwegian, Spanish , Swedish

[Read More](#)

SKU: 012203715

Price:

Kategori: [Fall Limit](#)



WORKER INDUSTRIAL ONE SIZE FALL ARREST KIT

DESCRIPTION

When working in construction and industry, it is important to work safely. Our fall protection kit Worker Industrial is suitable for you who work in a variety of environments in construction and industry. The kit includes a Worker Base harness, a 2 meters fall arrest lanyard and an anchor sling, all packed in a practical bag.

The difference between this fall protection kit and Worker Industrial Pro is that this package contains a simple fall arrest lanyard that fits in environments where large movement is not required.

Our Worker range is affordable products with high quality and comfort - in our own brand Cresto. With Worker you get products with high quality and long service life that provide safety when working at heights.

SEGMENTS

- General industry

Product includes	A full body harness, a 2 meters fall arrest lanyard, an anchor sling and a bag
Packing type	Bag
Maximum number of users	1
Maximum load (kg)	100.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Polyamide, Polyester, Aluminum

CLASSIFICATION

PPE-category Category 3

EN-standard EN 355 : 2002, EN 362 : 2004, EN 363 : 2018, EN 795 : 2012

Notified body 0402, RISE Research Institutes of Sweden, Box 857, SE-50115 Borås, Sweden

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

DOCUMENTS

Manual languages English , Swedish , Norwegian, Danish , Finnish, German, French, Spanish

[Read More](#)

SKU: 012220030

Price:

Kategori: [Fall Limit](#)



WORKER SRL ONE SIZE FALL ARREST KIT

When working in construction and industry, it is important to create the right conditions for working safely and flexibly. Our fall protection kit Worker SRL is suitable for you who work in a variety of environments in construction and industry. The kit includes a Worker Base + harness, a 15 meter self retractable lanyard (SRL) and an anchor sling.

Thanks to the SRL C15H with wire, the kit can be used for both ladder and roof work, as the SRL is certified for both horizontal and vertical work.

Our Worker range is affordable products with high quality and comfort - in our own brand Cresto. With Worker you get products with high quality and long service life that provide safety when working at heights.

SEGMENTS

- Pitch roof work
- General industry

Product includes	A full body harness, a self retractable lanyard with wire and an anchor sling.
Adjustable under load	No
Energy absorber	Yes
Fall indicator	Yes
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Rope	6 mm wire

CLASSIFICATION

PPE-category Category 3

EN-standard EN 363 : 2018

0402, RISE Research Institutes of Sweden,
Box 857, SE-50115 Borås, Sweden, 0102,

Notified body SGS UK Ltd, Unit 202b Worle Parkway,
Weston-superMare, Somerset BS22 6WA,
United Kingdom

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span 10 + 2 years. Product lifecycle 10 years + 2 years stock keeping

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes


Manual languages English , Swedish , Norwegian, Danish , Finnish, German, French, Spanish

[Read More](#)

SKU: 012220039

Price:

Kategori: [Fall Limit](#)

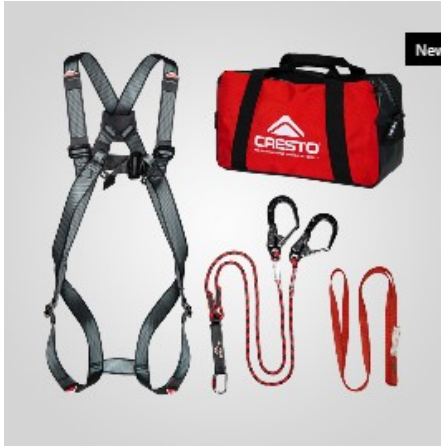

WORKER SERVICE ONE SIZE FALL ARREST KIT

When working in construction and industry, it is essential to work safely and use the chosen equipment correctly. Our fall protection kit Worker Service is suitable for work in a variety of environments in construction and general industry. The kit includes a Worker Base harness, a 2 meters double fall arrest lanyard and an anchor sling, all packed in a practical bag.

The kit is suitable when climbing up and down ladders and working in various industrial environments as, e.g. a service technician.

Our Worker range is affordable products with high quality and comfort - in our own brand Cresto. With Cresto Worker, you get products with high quality and a long life.

Product includes	A full body harness, a dubbel 2 meters fall arrest lanyard, an anchor sling and a bag
Packinging type	Bag
Maximum number of users	1
Maximum load (kg)	100.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Aluminum , Polyamide, Polyester

CLASSIFICATION

PPE-category Category 3

EN-standard EN 355 : 2002, EN 360 : 2002, EN 362 : 2004, EN 795 : 2012

Notified body 0402, RISE Research Institutes of Sweden, Box 857, SE-50115 Borås, Sweden

ANNUAL INSPECTION

Life span 10 + 2 years. Product lifecycle 10 years + 2 years stock keeping

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity


Yes

[Read More](#)

SKU: 012220037

Price:

Kategori: [Fall Limit](#)

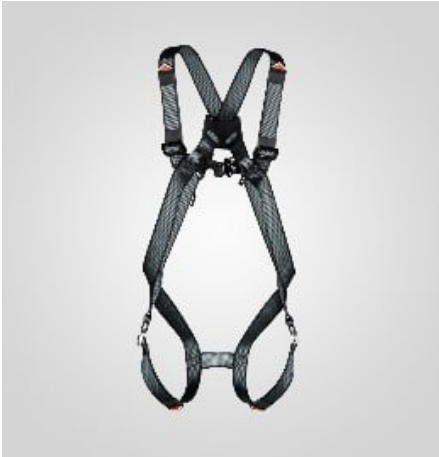

WORKER BASE+ HARNESS 1116 ONE SIZE

Worker Base+ is a harness with clip buckles and with connection points on the chest and back. The harness is tested and approved for users up to 140 kg and is manufactured in one-size. The harness is made of a powerful 45 mm polyester belt that can handle 38 kN, which is a characteristic of a Cresto harness.

SEGMENTS

- Pitch roof work
- General industry
- MEWPs

Front A-point	Webbing loops
Chest buckles	Quick buckles in steel with stainless components Strength >20kN
Back A-point	Galvanized steel 50 mm >22kN
Leg buckles	Quick buckles in steel with stainless components Strength >22kN
Adjustable under load	No
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Material	Polyester

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 360 : 2002

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes

[Read More](#)

SKU: 012200061

Price:

Kategori: [Fall Limit](#)



ENERGY TWIN-FLEX H, 1.9M DOUBLE ELASTIC FALL ARREST 1302-TF

A double fall arrest lanyard is designed to suit you who need to move when you work at heights. With double hooks, you always have a hook anchored when you move with the other hook. This is to provide the optimal security on, for example, scaffolding, mobile platforms or industries.

Energy Twin-Flex is manufactured as a flexible tube with internal elasticity, which allows you to stretch the line to a maximum length of 1.9 meters. At the beginning of the rope, there is an external absorber mounted which is released in case of a fall and catches you. The cover on the absorber can easily be replaced if it becomes dirty or damaged to ensure that the rope underneath is protected in the best way.

SEGMENTS

- General industry
- Tower climber
- MEWPs
- Scaffolding
- Wind energy

Attaching connector 1	Oval twist lock carabiner in aluminum, mounted with captive pin
Attaching connector 2	Big aluminum hook with 63 mm opening
Energy absorber	Yes
Fall indicator	Yes
Mechanics	Tear-webbing absorber
Maximum number of users	1
Maximum load (kg)	100.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Polyamide

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 355 : 2002

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

DOCUMENTS

Declaration of Conformity	Yes
---------------------------	-----

[Read More](#)

SKU: 012203105

Price:

Kategori: [Fall Limit](#)



WORKER TWIN-ROPE H FALL ARREST LANYARD 1302-TF 1502 2 M

A fall arrest lanyard with rope that is tested and approved for users up to 100 kg. The 12 mm thick rope makes it enduring. The fall arrester is located in an openable bag to make it easier to carry out an annual inspection according to EN 365. The product is suitable for work where the user moves alternately.

SEGMENTS

- General industry
- Tower climber
- Scaffolding
- Wind energy

Attaching connector 1	Oval twist lock carabiner in aluminum, mounted with captive pin
Attaching connector 2	Big aluminumhook with 60 mm opening
Energy absorber	Yes
Fall indicator	Yes
Mechanics	Tear-webbing absorber
Maximum number of users	1
Maximum load (kg)	100.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Polyamide

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 355 : 2002

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number

RFID


Yes

[Read More](#)

SKU: 012203725

Price:

Kategori: [Fall Limit](#)

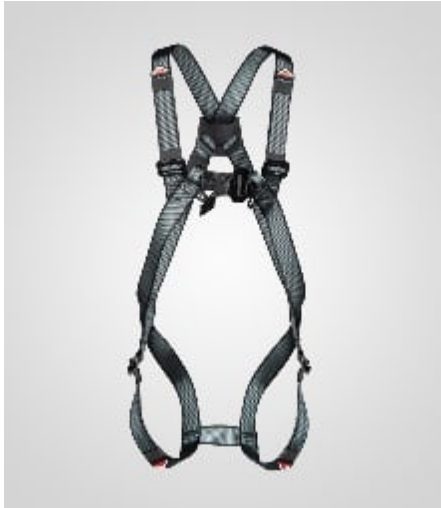

WORKER BASE HARNESS 1115 ONE SIZE

Worker Base is a harness with manual buckles and with connection points on the chest and back. The harness is tested and approved for users up to 140 kg and is manufactured in one-size. The harness is made of a robust 45 mm polyester belt that can handle 38 kN, which is characteristic of a Cresto harness.

SEGMENTS

- Pitch roof work
- General industry
- MEWPs

Front A-point	Webbing loops
Chest buckles	Manual steel buckles
Back A-point	Galvanized steel 50 mm > 22kN
Leg buckles	Manual steel buckles
Adjustable under load	No
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Material	Polyester

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 361 : 2004

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

DOCUMENTS

Declaration of Conformity	Yes
---------------------------	-----

[Read More](#)

SKU: 012200060

Price:

Kategori: [Fall Limit](#)



IKAR TRIPOD DB-A1

DESCRIPTION

DB-A1 is a tripod from IKAR made from aluminum with corrosion resistant coating and its adjustable square section legs have been designed for mobile use in conjunction with the HRA Rescue Device and/or winches. The tripod is robust and have a load carrying capacity of maximum 2 persons.

A tripod is suitable for confined spaces such as cisterns, tanks etc both as a fall arrest system and as an evacuation solution. We recommend our course Confined space to gain knowledge on how to make best use of the product and utilize it to its maximum capacity.

DB-A1 is available in two versions:

DB-A1, adjustable between 1534 - 2480 mm, total weight 19 kg


DB-A1 Short, adjustable between 1201 - 1859 mm, total weight 16 kg

Complete the equipment with IKAR fall arrest and rescue device HRA up to 42 m or with IKAR Load and Personnel winches ALKO901T and PLWT. Additional IKAR pulleys and a tripod bracket are required when using with a HRA or IKAR Winch.

SEGMENTS

- Confined space

PRODUCT INCLUDES

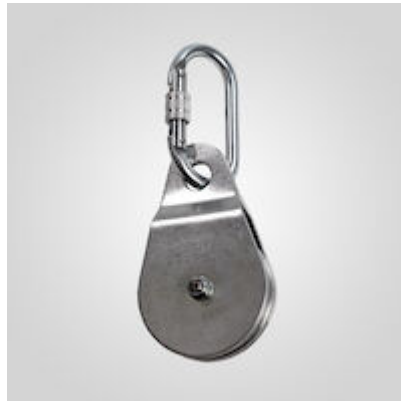

Deflection Roller

Pulley with carabiner

Product includes	Tripod and a pulley with carabiner
Adjustable under load	No
Energy absorber	No
Fall indicator	No
Maximum number of users	2
Minimum working temperature (c)	-40.0

Maximum working temperature (c) 100.0
Minimum breaking strength - MBS (kN) 15.0
Material Aluminum

CLASSIFICATION

PPE-category Category 3
EN-standard EN 795 : 2012

ANNUAL INSPECTION

Annual inspection Yes, every 12 months
Warranty 2 year
Identification Serial number
RFID No

DOCUMENTS

Declaration of Conformity Yes

[Read More](#)

SKU: 012280004

Price:

Kategori: [Fall Limit](#)



IKAR HRA BRACKET FOR TRIPOD 41-54/9.5-30 SUITS TRIPOD DB-A1

Bracket to connect a self retractable lanyard IKAR HRA (up to 60 meter) to the tripod DB-A1 from IKAR.

SEGMENTS

- General industry
- Confined space

Product includes	One bracket
Adjustable under load	No
Energy absorber	No
Fall indicator	No
Material	Aluminum

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Warranty	2 year
Identification	No
RFID	No

DOCUMENTS


Declaration of Conformity	No
---------------------------	----

[Read More](#)

SKU: 012280012

Price:

Kategori: [Fall Limit](#)

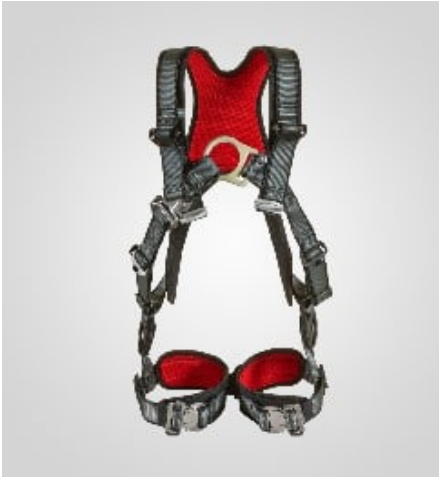

FUSION PRO+

An innovative premium harness for maximum comfort and universal use in tough environments such as offshore industries. The design of the harness makes it suitable for work environments where the user does not want to feel restricted, but all-day safe in their workplace. Fusion Pro+ is flexible and easily adjustable with a wide range of fitting possibilities. Due to the design and function this harness is suitable for helicopter lifting.

The Cresto Fusion harness range is unique due to certification for support and positioning, without having a belt. The Fusion Pro+ harness is furnished with self-luminous attachment D-rings, for quick identification and rescue if light disappears.

SEGMENTS

- Pitch roof work
- General industry
- Offshore
- Confined space
- Scaffolding
- Wind energy

Adjustable under load	Yes
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0
Material	Polyester

CLASSIFICATION

PPE-category Category 3

EN-standard EN 361 : 2004, CNB/P11.043 Rev2

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span 10 + 2 years. Product lifecycle 10 years + 2 years stock keeping

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes

Size
Colour


L/XL, S/M, XXL
Black/Grey, Hi-Vis Yellow

[Read More](#)

SKU: 0122004

Price:

Kategori: [Fall Limit](#)

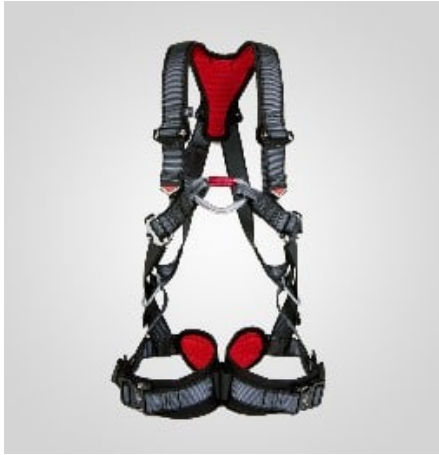

FUSION ACTIVE

Fusion Active is designed to fit most work environments where the user does not want to feel restricted in their work. The harness is flexible and adjustable to give the user the best comfort when working at heights.

What makes Fusion Active unique is that it's approved for support and positioning even though it has no support belt.

SEGMENTS

- Pitch roof work
- General industry
- MEWPs
- Scaffolding

PRODUCT PROPERTIES

Front A-point	Triangle shaped carabiner (carabiner 9656) in textile loops
Chest buckles	Triangle shaped carabiner of aluminum (carabiner 9656)
Back A-point	Plastic overmoeld steel ring self luminous PVC 53 mm
Side D-rings	Galvanized steel 50 mm >30kN for positioning
Side adjuster	Heat treated steel saltspray tested 74 hours >18kN
Leg buckles	Quickbuckles in steel with stainless components Strength >20kN
Padding material	Breathable 3-D mesh
Adjustable under load	Yes
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	15.0

Material	Polyester
Extra functions	Support belt function without support belt

CLASSIFICATION

PPE-category Category 3

EN-standard EN 361 : 2004, CNB/P11.043 Rev2

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span 10 + 2 years. Product lifecycle 10 years + 2 years stock keeping

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes

Size L/XL, s-m-long, S/M, XXL
Colour Black/Grey

[Read More](#)

SKU: 01220008

Price:

Kategori: [Fall Limit](#)



IKAR HRA - 18 M SELF RETRACTABLE LANYARD HRA18 18 M

HRA from Ikar is a self retractable lanyard with an aluminum housing with a built-in fall arrester and galvanized steel wire. The device is equipped with a rescue winch with a self-locking function and an automatic return of the wire. This to be able to evacuate a person in need.

SEGMENTS

- Confined space

Product includes	One self retractable lanyard.
Adjustable under load	No
Energy absorber	Yes
Fall indicator	Yes
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-30.0
Maximum working temperature (c)	60.0
Minimum breaking strength - MBS (kN)	15.0
Material	Aluminum , Galvanized steel
Functions	Vinch function

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 360 : 2002

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Warranty	2 year
Identification	Serial number
RFID	No

DOCUMENTS

Declaration of Conformity	No
---------------------------	----

[Read More](#)

SKU: 012210076

Price:

Kategori: [Fall Limit](#)



ARMUR+ SINGLE-S HZ SRL SELF RETRACTABLE LANYARD C15H 15 M

Armur + Single-S is a self retractable lanyard with galvanized steel wires that is approved for both vertical and horizontal use, making it suitable for work on roofs and in industries. Attach the anchorage at the harness's anchor point on the back for best freedom of movement.

Thanks to its smart design with a robust design, the equipment's service is cost effective.

SEGMENTS

- Pitch roof work
- General industry

Attaching connector 1	Oval screwgate carabiner in aluminum
Attaching connector 2	2-way swivel snap-hook in aluminum
Energy absorber	Yes
Fall indicator	Yes
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-30.0
Maximum working temperature (c)	50.0
Minimum breaking strength - MBS (kN)	15.0
Material	Galvanized steel

CLASSIFICATION

PPE-category Category 3

EN-standard EN 360 : 2002, CNB/P11.060 Typ A

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes

[Read More](#)

SKU: 012212270

Price:
Kategori: [Fall Limit](#)



SINGLE SNAP HZ SRL - 10 M SELF RETRACTABLE LANYARD C10H 10 M

Armur + Single-S is a self retractable lanyard with galvanized steel wires that is approved for both vertical and horizontal use, making it suitable for work on roofs and in industries. Attach the anchorage at the harness's anchor point on the back for best freedom of movement.

Thanks to its smart design with a robust design, the equipment's service is cost effective.

SEGMENTS

- Pitch roof work
- General industry

Attaching connector 1	Oval screwgate carabiner in aluminum
Attaching connector 2	2-way swivel snap-hook in aluminum
Energy absorber	Yes
Fall indicator	Yes
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-30.0
Maximum working temperature (c)	50.0
Minimum breaking strength - MBS (kN)	15.0
Material	Galvanized steel

CLASSIFICATION

PPE-category Category 3

EN-standard EN 360 : 2002, CNB/P11.060 Typ A

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Warranty 2+1 year when registered in Inspector

Identification Serial number

RFID Yes

DOCUMENTS

Declaration of Conformity Yes

[Read More](#)

SKU: 012212260

Price:
Kategori: [Fall Limit](#)



SINGLE SCAFF HZ SRL - 2 M SELF RETRACTABLE LANYARD W2H 2 M

Like the Armur Single-S, Armur Single-H is one of the smallest and lightest self retractable lanyards on the market but with a large hook instead of a snap hook. The design is robust and the 20 mm wide Dyneema webbing is strong and durable. The self retractable lanyard is approved for horizontal use and is therefore well suited for mobile platforms and scaffolding.

With a self-retracting and self-locking connecting lanyard, braking mechanism reacts smoothly and limits the users fall distance to a minimum. Thanks to its light weight, it is easy to connect the device to the harness's anchor point in the back.

SEGMENTS

- General industry
- MEWPs
- Scaffolding

PRODUCT PROPERTIES

Attaching connector 1	Oval screwgate carabiner in aluminum
Attaching connector 2	Aluminum hook with 60 mm opening
Energy absorber	Yes
Fall indicator	Yes
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-30.0
Maximum working temperature (c)	50.0
Minimum breaking strength - MBS (kN)	15.0
Material	Dyneema

CLASSIFICATION

PPE-category Category 3

EN-standard EN 360 : 2002, CNB/P11.060 Typ A

ANNUAL INSPECTION

Annual inspection Yes, every 12 months

Life span 10 years

Warranty 2+1 year when registered in Inspector

Identification	Serial number
RFID	Yes

DOCUMENTS

Declaration of Conformity	Yes
---------------------------	-----

[Read More](#)

SKU: 012212207

Price:

Kategori: [Fall Limit](#)



1-POINT HARNESS RED

Suitable for fall arrest or work restraint systems, our entry level full body harness is light weight and easy to use, allowing you a secure fit.

Features

- CE certified
- Retail box which aids presentation for retail sales
- Dorsal D-ring
- Flat bar buckles
- Inspection cover for protection of product label
- Chest and leg adjustment points

Materials

Alloy Steel, Heat Treated

[Read More](#)

SKU: FP11RER

Price:

Kategori: [Fall Limit](#)



FALL LIM MILLER BL RHINO 2,7M

Fall limiter with 2,7 m stainless steel wire with swivel hook, and 65 mm aluminium scaffold hook. Very light and small unit.

[Read More](#)

SKU: 0-1012-392-98-ST

Price:

Kategori: [Fall Limit](#)



RESCURE KIT I'D 50M

Descenders to independently descent, lowering of others, evacuation and rescue. In budd rescue operations, the rescuer and patient are both connected to the brake during the abseil operation. Can also be used for free hanging work when descending and ascending on ropes. Self-locking, slipping when pulling the handle. Panic function that lock to the rope, occur when drag the handle maximum. Consists of evacuation brake, carbiner, rope protection, sling, rope, rope-bag

[Read More](#)

SKU: 0-40200-50-98-ST

Price:

Kategori: [Fall Limit](#)



POS LINE MILLER HANDZUP 2M

Positioning line. Adjustable position, self-locking function. 26 mm carabiner on the end of rope, 18 mm carabiner at the tensioner.

[Read More](#)

SKU: 0-1032-97-98-ST

Price:

Kategori: [Fall Limit](#)



VEST HAR MILLER H-DESIGN SIZE 2

Vest harness in fluorescent color on the vest. Delivered with H-Design 2 point harness with automatic buckles and 2 front anchor loops. Can be combined with other H-Design harnesses

[Read More](#)

SKU: 0-1032-918-98-2

Price:

Kategori: [Fall Limit](#)



LIFELINE HORIZONTAL MILLER 20M

Horizontal lifeline, adjustable 5-20 m. Can be used by up to 2 people. Supplied with 2 slings, packed in bag.

[Read More](#)

SKU: 0-1031-456-98-ST

Price:

Kategori: [Fall Limit](#)



FALL LIM MILLER TWIN TURBO 2M

Fall limiter with two 2 m webbing with 65 mm aluminium scaffold hook. Connect with bracket, to D-ring on the harness.

[Read More](#)

SKU: 0-1029-716-98-ST

Price:

Kategori: [Fall Limit](#)



FALL LIM MILLER TURBOLITE 2M

Fall limiter with 2 m webbing, and 2 pcs 18 mm stainless steel twistlock carabiner.

[Read More](#)

SKU: 0-1018-15-98-ST

Price:

Kategori: [Fall Limit](#)



HARNESS MILLER ROPAX L/XL

3 point harness for access with rope and for climbing and rescue. Quick release buckles, extra wide padded belt that provides excellent support and comfort during work. Three large loops for tools and accessories

[Read More](#)

SKU: 0-1014-433-98-L/XL

Price:

Kategori: [Fall Limit](#)



HARNESS MILLER H-DESIGN SIZE3

2-point harness that fits well with building/construction and traditional industry. Water repellent stretch web over shoulder, adjustable chest webbing with D-ring for auto centering, D-ring on back and 2 fall indicators. Approved for 140 kg

[Read More](#)

SKU: 0-1032-877-98-ST

Price:

Kategori: [Fall Limit](#)



HARNESS MILLER H-DESIGN SIZE2

2-point harness that fits well with building/construction and traditional industry. Water repellent stretch web over shoulder, adjustable chest webbing with D-ring for auto centering, D-ring on back and 2 fall indicators. Approved for 140 k

[Read More](#)

SKU: 0-1032-876-98-ST

Price:

Kategori: [Fall Limit](#)



TOOL LANYARD MILLER BANDIT

Tool lanyard that prevents tools from falling down and causing damage. Attach to work belt or around wrist.

[Read More](#)

SKU: 0-1100-210-98-ST

Price:

Kategori: [Fall Limit](#)



CARABINER MILLER FRELON

Carabiner, aluminium, 23 mm opening.

[Read More](#)

SKU: 0-1018-971-98-ST

Price:

Kategori: [Fall Limit](#)



VEST HAR MILLER H-DESIGN SIZE 3

Vest harness in fluorescent color on the vest. Delivered with H-Design 2 point harness with automatic buckles and 2 front anchor loops. Can be combined with other H-Design harnesses

[Read More](#)

SKU: 0-1032-919-98-3

Price:

Kategori: [Fall Limit](#)



HARNESS MILLER H-DESIGN SIZE1

2-point harness that fits well with building/construction and traditional industry. Water repellent stretch web over shoulder, adjustable chest webbing with D-ring for auto centering, D-ring on back and 2 fall indicators. Approved for 140 kg.

[Read More](#)

SKU: 0-1032-875-98-ST

Price:

Kategori: [Fall Limit](#)

FALL LIM MILLER TURBOLITE 2M

Fall limiter with 2 m webbing with 18 mm stainless steel twistlock carabiner, and 65 mm aluminium scaffold hook.

[Read More](#)

SKU: 0-1018-14-98-ST

Price:

Kategori: [Fall Limit](#)





FALL LIM MILLER TURBOLITE 2M

Fall limiter with 2 m webbing with 65 mm aluminium scaffold hook, and 18 mm stainless steel twistlock carabiner.

[Read More](#)

SKU: 0-1018-13-98-ST

Price:

Kategori: [Fall Limit](#)

FALL LIMIT MILLER SC EDGE 2,7M

Fall limiter with 2.7 m webbing with 18 mm stainless steel twistlock carabiner, and 65 mm aluminium scaffold hook. The webbing passes test on sharp edges

[Read More](#)

SKU: 0-1016-841-98-ST

Price:

Kategori: [Fall Limit](#)



HARNES CRESTO 1123 ARTISAN PRO

2-punkts sele som passer godt til bygg/anlegg og tradisjonelt industri. Ryggpolstring i pustende materiale, hurtigspenner, justerbare bånd. Patentert festepunkt i front som er plassert ved livet og gjør at utstyret kommer bort fra arbeidsområdet. Dersom man faller vil forankringsløkkene glide oppover og fungere som et høyt festepunkt å sørge for at kroppen henger riktig.

EN-Standard

- **Standard informasjon**

EN 361

Pre order

Pre order this product by selecting size, colour and number. Delivery time 1-2 weeks

[Read More](#)

SKU: 0-30005-21223-10

Price:

Kategori: [Fall Limit](#)

